
SCHEDA TECNICA ISO3821

COSTRUIAMO INSIEME

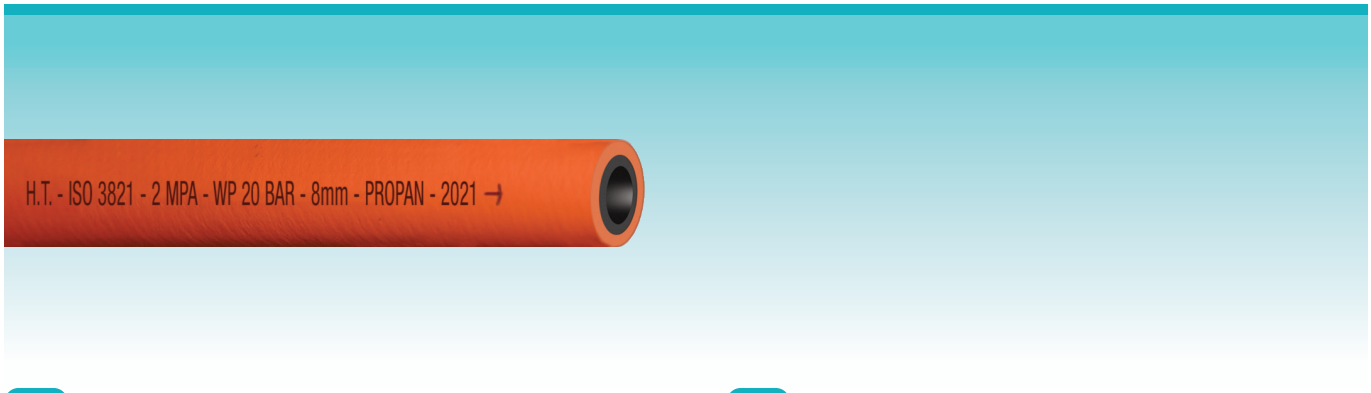

IT IMPIEGO

Tubo in gomma long length idoneo per conduzione di gas propano nelle attrezzature di saldatura.

Normative di riferimento: **ISO 3821.**

- **TEMPERATURA DI PROVA:** -25°C +80°C

STRUTTURA

- **Sottostrato:** liscio in gomma nera resistente all'azione del gas propano.
- **Rinforzi:** inserzioni di filati sintetici ad alta resistenza.
- **Copertura:** in gomma arancione resistente all'abrasione, agli agenti atmosferici e al contatto con scorie di saldatura incandescenti.
- **Superficie:** liscia estrusa.
- **Marcatura:** ad inchiostro "H.T. - ISO 3821 - 2MPa - W.P. 20 BAR - i.d. - PROPANE - anno".

EN APPLICATION

Long length rubber hose suit in welding equipments for propangas.

Standards: **ISO 3821.**

- **TEMPERATURE RANGE:** -25°C +80°C

CONSTRUCTION

- **Tube:** black, smooth propane gas resistant rubber.
- **Reinforcement:** high strength synthetic textile yarn.
- **Cover:** orange, abrasion and weathering and red hot welding slags resistant rubber.
- **Surface:** smooth extruded.
- **Branding:** ink marking "H.T. - ISO 3821 - 2MPa - W.P. 20 BAR - i.d. - PROPANE - year".

DIAMETRO INTERNO INSIDE DIAMETER		DIAMETRO ESTERNO OUTSIDE DIAMETER		PESO TEORICO WEIGHT		PRESS. ESERCIZIO WORKING PRESSURE		PRESS. SCOPPIO BURST PRESSURE		RAGGIO CURVATURA BENDING RADIUS		LUNGHEZZA LENGTH	
mm	inch	mm	inch	kg/mt	lbs/ft	bar	psi	bar	psi	mm	inch	mt	ft
8	5/16"	15	19/32"	0.17	0.11	20	300	60	900	40	1.57"	100	328